



(51) International Patent Classification:  
*C08L 93/02* (2006.01) *B24B 13/005* (2006.01)

(21) International Application Number:  
PCT/EP2009/064633

(22) International Filing Date:  
4 November 2009 (04.11.2009)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
08305794.3 10 November 2008 (10.11.2008) EP

(71) Applicant (for all designated States except US): **ESSILOR INTERNATIONAL (COMPAGNIE GENERALE D'OPTIQUE)** [FR/FR]; 147, rue de Paris, F-94220 Charenton le Pont (FR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PAILLET, Romain** [FR/US]; ESSILOR International (Compagnie Generale d'Optique), 147, rue de Paris, F-94220 Charenton le Pont (FR). **FELTEN, Yohann** [FR/FR]; ESSILOR International (Compagnie Generale d'Optique), 147, rue de Paris, F-94220 Charenton le Pont (FR). **GORDIET, Yannick** [FR/FR]; ESSILOR International (Compagnie Generale d'Optique), 147, rue de Paris, F-94220 Charenton le Pont (FR). **ALCORTA, José** [FR/FR]; 21, avenue Lucien Lerousseau, F-33130 Begles (FR). **OLIVE, Maxime** [FR/FR]; Résidence les Terrasses, 2B, App 31, Rue Eugène Delacroix, F-33400 Talence (FR).

(74) Agents: **HUISMAN, Aurélien** et al.; Cabinet Plasseraud, 52, rue de la Victoire, F-75440 Paris Cedex 09 (FR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


**Declarations under Rule 4.17:**

— of inventorship (Rule 4.17(iv))

**Published:**

— with international search report (Art. 21(3))

(54) Title: A THERMOPLASTIC MATERIAL

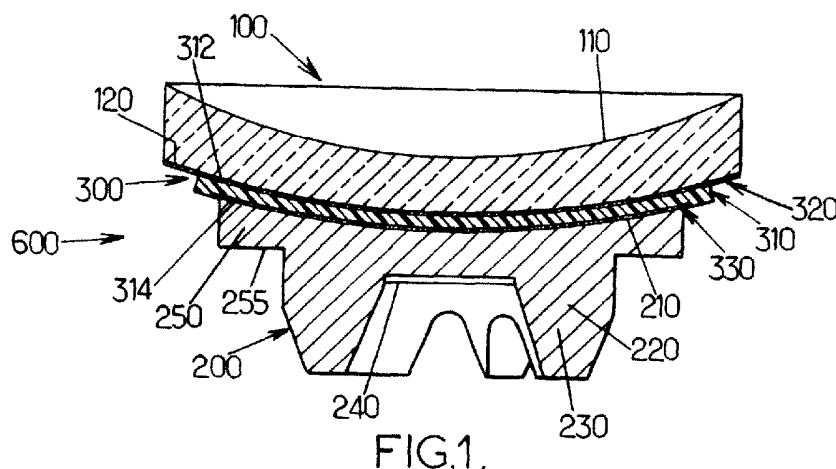

(57) Abstract: Use of a thermoplastic material for blocking an optical substrate (100) in a machining position, wherein the thermoplastic material is formulated from a composition comprising a shellac and a plasticizer where the shellac and the plasticizer are chosen so as to have the softening point of the thermoplastic material greater than or equal to 60°C and smaller than or equal to 85°C.

## A THERMOPLASTIC MATERIAL

This invention relates to a thermoplastic material for blocking in a machining position an optical substrate  
5 and a method of blocking an optical system.

The process of preparing optical or ophthalmic lenses begins usually with an unfinished or semi-finished glass or plastic lens blank. Typically a semi-finished lens blank has a finished polished front surface and an  
10 unfinished back surface. By grinding away material from the back surface of the lens blank the required corrective prescription is generated. Thereafter the surface, having had the corrective prescription imparted thereto, is polished and the peripheral edge of the thus processed lens  
15 blank is provided with a final desired contour thereby establishing a finished optical or ophthalmic lens. According to other processing methods, the finished ophthalmic lens can be directly processed from a lens blank using for example three directional machining. The lens  
20 blank can be either a plastic or a glass lens blank.

It is necessary during these various processing operations to securely maintain the lens blank in accurate alignment and in place on the lens blocking device. This procedure is often referred to as "lens blocking".

25 Heretofore, various materials were employed to secure the lens blank to the lens blocking device. These materials include glues, pitch and low temperature fusible metal alloys. The use of glues and pitch, in addition to being messy, suffers the further disadvantage of generally  
30 being non-reusable or non-reclaimable. While the prior art use of low temperature metal alloys eliminated some of these disadvantages experienced with the use of glues and

pitch, nonetheless, the use of these metal alloys, both in their preparation and their reclamation caused significant environmental and health hazards especially since these alloys were most often fabricated from such metals as cadmium, tin, lead and bismuth. Of these metals, lead and cadmium are the most toxic. Lead is strong protoplasmic poison and can be introduced into the body by ingestion, inhalation and skin absorption. Cadmium poisoning is similar to lead in many ways and is introduced into the body in the same way as lead. Like lead, cadmium is stored in the liver, kidney and bone. Procedures for the formulation of such alloys and reclamation processes so as to enable its re-use as a material to secure a lens blank to a lens block thus exposes workers to serious environmental and health hazards. The formation of these alloys often is accomplished through the use of powdered or particulate metals which are subjected to a sintering and heat treating process. Fumes and/or dust particles of these metals are released to the ambient atmosphere thereby creating environmental and health hazards for those formulating these alloys. The same hazards exist for those attempting to reclaim the used low temperature metal alloy blocking material.

To overcome these issues, organic low shrinkage materials have been developed to be used as lens blocking materials.

Patent US 6,036,313 in the name of 3M Innovative Properties Company discloses examples of compound families suitable for lens blocking with thermoplastic materials.

The disclosed blocking compositions have many advantages over traditional metal alloy materials. For example, the lens blocking compositions are non-toxic, environmentally safe, and preferably biodegradable. The

materials preferably can be used with existing processing equipment and may be recycled. An optical lens blocking device can be used that comprises a solidified mass of a thermoplastic blocking composition. The blocking  
5 composition is solid at 21°C and has a low melting point.

There remains a need for improving blocking material for blocking a lens blank to a lens blocking device thanks a cheap, non-toxic and easy to handle material.

10 The invention relates to a thermoplastic material formulated from a composition comprising a shellac and a plasticizer where the shellac and the plasticizer are chosen so as to have the softening point of the thermoplastic material greater than or equal to 60°C and  
15 smaller than or equal to 85°C and to the use of such thermoplastic material for blocking an ophthalmic substrate in a machining position.

The inventors have noticed that the thermoplastic blocking compositions disclosed in US 6,036,313, are hard  
20 to handle because they go through sharp transitions from a solid state to a molten state without going gradually through a softening transition.

The thermoplastic material according to the invention presents a softening point at a temperature  
25 compatible with the blocking method for blocking an ophthalmic lens. Therefore, the thermoplastic material according to the invention may be heated. For example the thermoplastic material may be heated at a temperature between 55°C and 60°C without going through a sharp  
30 transition from a solid state to a molten state.

According to further embodiments of the invention, the thermoplastic material may comprised one or any possible combinations of the following features:

- 5       • the shellac and plasticizer are chosen so as to have the hardness of the thermoplastic material at room temperature greater than or equal to 40 when measured using the Shore D method;
- 10       • the composition comprises, as a percentage by weight of the thermoplastic material, at least or equal to 60% and at most or equal to 80% of shellac;
- the composition comprises, as a percentage by weight of the thermoplastic material, at least or equal to 20% and at most or equal to 40% of plasticizer;
- 15       • the shellac comprises waxed shellac and/or dewaxed shellac and/or bleached shellac;
- the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of rosin or modified rosin;
- 20       • the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of ester of rosin;
- the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of hydrocarbon-based resin; and
- 25       • the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of C5 aliphatic hydrocarbon resin.

The invention also relates to a use of a thermoplastic material according to the invention as blocking material  
30 for blocking an optical substrate in a machining position.

The invention further relates to a preformed optical substrate block comprising a thermoplastic block used to allow an optical substrate to be blocked on the preformed optical substrate block wherein the thermoplastic  
5 block is made of a thermoplastic material having a softening point greater than or equal to 60°C and smaller than or equal to 85°C.

The thermoplastic material may be a thermoplastic material according to the invention.

10 The preformed optical substrate block according to the invention may be an entire preformed optical substrate block where the preformed optical substrate block and the thermoplastic block are a single part made of a thermoplastic material.

15 The preformed optical substrate block according to the invention may be provided without a hole, for example without a central hole, for example without a hole in which a moving hollow tube is placed.

The invention further relates to a method for  
20 blocking an optical substrate in a machining position using a thermoplastic material according to the invention.

The invention also relates to a method of blocking an optical substrate to be machined comprising the steps of:

25 - an optical substrate providing step in which a optical substrate (100) is provided;

- a preformed optical substrate block providing step in which a preformed optical substrate block (300) is provided;

30 - a surface heating step in which a surface of the preformed substrate block (300) is heated at a docking temperature greater than or equal to 50°C and smaller than

or equal to 60°C, for example 10°C to 25°C below the softening temperature of the thermoplastic material;

- a docking step in which the optical substrate is docked to the heated surface of the preformed substrate block (300) so as to be positioned in a machining position; wherein the preformed optical substrate block (300) is according to the invention.

The method according to the invention may comprise using as thermoplastic material a thermoplastic material according to the invention.

Advantageously, the use of a thermoplastic material according to the invention allows reducing the required heat amount for the blocking step.

Furthermore, only a local area of the blocking material needs to be heated. Therefore, the stress suffered by the optical substrate when cooling the blocking material is reduced when using a blocking material according to the invention.

Advantageously, the optical and cosmetic properties of the optical substrate are enhanced.

According to the present invention, an "optical substrate" may be an optical lens which surfaces have already been machined, a semi-finished lens blank with a polished front surface, a lens blank with two unfinished surfaces.

The optical substrate can be made for example, but not limited to, of plastic or glass. More generally, any combination of material suitable to obtain an optical system may be used. One or two surfaces of the optical substrate may be coated.

Thus an "optical substrate" of the invention can be every optical part that needs to be machined, as for example to be cut and/or grinded and/or polished and/or edged and/or engraved, in order to provide a machined  
5 optical substrate, for example an optical or ophthalmic lens.

In the sense of the invention "Shellac" is a resin made of Lac. Lac being the scarlet resinous secretion of a number of species of Lac-producing insects, the most  
10 commonly cultivated of which is Kerria lacca.

In the sense of the invention the "softening point" is measured using the well known "ball-ring" method as described in standard NF EN 1238 "Determination of the softening point of thermoplastic adhesives" - December  
15 1999.

According to the well known "ball-ring method", a steel ball of a given dimension, for example 9.53 mm, and mass, for example 3.5 g, is placed on a sample of thermoplastic material contained on a metal ring of  
20 specified dimensions. The apparatus is heated at a constant rate, for example 5°C/min from at least 10°C below the expected softening point. The "softening point" corresponds to the temperature at which the sample is sufficiently soft to allow the ball to pass through the metal ring.

25 In the sense of the invention the "hardness" corresponds to the Shore "D" hardness, using the measuring method described in standard ASTM D2240.

In the sense of the invention "machining an optical substrate" may correspond to manufacturing and/or polishing  
30 and/or grinding and/or edging the optical substrate.



Non limited embodiments of the invention will now be described with reference to the accompanying drawing wherein:

- 5       - figure 1 is a cross sectional view of an optical lens fixed on a preformed optical substrate block according to a first embodiment of the invention,
- figure 2 is a cross sectional view of a surface heating step of a process according to the invention,
- 10       - figure 3 is a cross sectional view of an optical lens fixed on a preformed optical substrate block according to a second embodiment of the invention, and
- figure 4 is a cross sectional view of an optical lens fixed on a preformed optical substrate block according to a third embodiment of the invention.
- 15

Skilled artisans appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help improve the understanding of the embodiments of the present invention.

The wording "upper" or "on" and "bottom" or "under" indicates positions relative to the optical lens when it is arranged so as the edge of the optical lens to be machined is substantially situated in a horizontal plane.

Said position is purely conventional and the optical lens can be machined in a non horizontal position.

As shown on figure 1, an optical lens 100 is secured on a preformed optical substrate block 600 comprising a thermoplastic block 300 made of a

thermoplastic material. The thermoplastic material has a softening point greater than or equal to 60°C, for example greater than or equal to 70°C and smaller than or equal to 85°C. According to an embodiment of the invention, the  
5 thermoplastic material has a softening point different than 75°C, for example greater than 75°C and smaller than or equal to 85°C.

The edge of said optical lens 100 is substantially situated in a horizontal plane.

10 The upper surface 110 of the optical lens 100 is a surface to be machined, as for an example to be ground and/or polished. The optical lens 100 can be further edged.

The bottom surface 120 of the optical lens 100 contacts the upper surface of the thermoplastic block 300.

15 According to an embodiment, the optical lens 100 is a semi-finished lens blank and the bottom surface 120 is a finished optical surface.

As for an example, the external diameter of the optical lens 100 is between 50 mm and 100 mm, for example  
20 equal to 80 mm.

According to an embodiment of the invention, the preformed optical substrate block 600 further comprises a holding unit 200 in a material being in a solid state at temperatures up to 100°C, for example up to 150 °C. The  
25 holding unit 200 may be a metallic part which comprises a bottom part 230, 220 and an upper part 250.

The lower part of bottom part 230 of the holding unit 200 may comprise means to orient the preformed optical substrate block 600 in corresponding orienting means of a  
30 tool (not represented) of a lens machining unit such as a

lathe or another movement inducing machine. Said tool may be a chuck or another fixing tool.

Internal surface 240 of the holding unit 200 may contact an upper surface of said tool.

5           The bottom part of the holding unit 200 also comprises a central part 220 which is a cylindrical part to be squeezed by said fixing tool of the machining unit.

          Upper part 250 has an external diameter larger than the diameter of the central part 220 and its bottom surface  
10   255 may lay on the upper surface of the tool of the lens machining unit and may comprise positioning means. The upper part 250 also comprises an upper assembling surface 210.

          As for an example the diameter of the upper part  
15   250 is 70 mm, the diameter of the central part 220 is 43 mm and the height of the holding unit 200 is between 20 mm and 30 mm.

          According to an embodiment of the invention the thermoplastic block 300 is made of a thermoplastic material  
20   formulated from a composition comprising a shellac and a plasticizer where the shellac and the plasticizer are chosen so as to have the softening point of the thermoplastic material greater or equal to 60°C, for example greater or equal to 70°C and smaller or equal to  
25   85°C.

          Advantageously, the thermoplastic material according to the invention presents a softening point and does not go through a sharp transition from a solid state to a molten state. Therefore, the thermoplastic material  
30   according to the invention when heated at a temperature greater or equal to 60°C and smaller or equal to 85°C,

keeps its shape unlike the thermoplastic disclosed in US 6,036,313.

According to an embodiment of the invention, the thermoplastic block 300 is arranged between the upper  
5 assembling surface 210 and the bottom surface 120 of the optical lens 100 in a three stacked layers arrangement where:

- the first layer is an adhesive tape 330 which bottom surface is fixed on upper assembling surface 210;
- 10 - the second layer is the thermoplastic block 300 which bottom surface 314 is arranged on the upper surface of the adhesive tape 330;
- the third layer is an adhesive tape 320 which bottom surface is arranged on the upper surface 312 of the  
15 thermoplastic block 300;
- the bottom surface 120 of the optical lens is fixed on the upper surface of the adhesive tape 320.

According to an embodiment, the adhesive tapes 320, 330 have a pressure-sensitive adhesive surface and a tack-  
20 free adhesion promoting surface. The tapes 320, 330 assist in the firm bonding of the optical lens 100 to the thermoplastic block 300 and to the holding unit assembling surface 210.

According to an embodiment, the tapes are  
25 conformable, that is, they follow the curvature of the lens blanks without any wrinkles or air bubbles; and translucent, that is, they permit light to pass there through. As a result, the lens may be visually aligned in the appropriate device prior to blocking. Still further,  
30 when the tapes are removed from the lens, they leave virtually no adhesive residue. Thus, messy and time

consuming cleaning operations need not be performed on the lens before it can be used.

Despite this clean removability, suitable tapes may exhibit excellent adhesion to the optical lens, to the thermoplastic block and to the holding unit. Additionally, the tapes may be able to withstand the shear forces encountered during the machining operations. As a result, lenses are held in accurate position throughout these operations. An added benefit offered by using an adhesive tape is the protection provided to the optical lenses from thermal and mechanical shock.

The composition of the exposed surface of the tape (i.e., the non-adhesive surface away from the optical lens or from the upper assembling surface of the holding unit) may be selected so as to achieve the desired degree of adhesion with a particular thermoplastic material.

Examples of suitable tapes are given in previously cited patent US 6,036,313.

The thermoplastic material should preferably be hard enough at its use temperature to function in the manner intended. For example, the thermoplastic material, when used to form a complete block, should be hard enough to withstand the forces and stresses imparted during the typical lens processing procedure, including any forces and stresses imparted to the composition during mounting and unmounting from the lens processing machinery as well as any forces imparted to the composition during the actual grinding or finishing operation. Compositions that deform or flow appreciably during these operations may be unsuitable. Suitable thermoplastic materials are solid at temperatures near or below room temperature. Preferred thermoplastic materials are solid at temperatures below

about 40°C, more preferred thermoplastic materials are solid at temperatures below about 45°C, and most preferred thermoplastic materials are solid at temperatures below about 50°C.

5           According to an embodiment of the invention illustrated on figure 3, the preformed optical substrate block 600 and the thermoplastic block 300 are a single part made of a thermoplastic material.

Advantageously, the use and storage of such  
10   preformed optical substrate block 300, 600 are easier than when the preformed optical substrate block 600 is provided in two parts.

The thermoplastic material has a softening point greater than or equal to 60°C, for example greater than or  
15   equal to 70°C and smaller than or equal to 85°C. According to an embodiment of the invention, the thermoplastic material has a softening point different than 75°C, for example greater than 75°C and smaller than or equal to 85°C.

20           The optical substrate 100 may be docked directly on the upper surface of the preformed optical substrate block 600. According to an embodiment of the invention, the optical substrate may be provided with an adhesive tape 320 on the bottom surface 120 of the optical lens 100.

25           According to an embodiment of the invention illustrated on figure 4, the upper part 250 of the holding unit 200 may have an external diameter significantly equal to the external diameter of the central part 220. The thermoplastic block 300 is arranged so as to cover at least  
30   part of the upper portion 250 of the holding unit 200. The invention also relates to a manufacturing method for

manufacturing a preformed optical substrate block according to the invention.

According to an embodiment of the manufacturing method of the invention, the single block preformed optical  
5 substrate block may be manufactured by providing the thermoplastic material, heating the thermoplastic material at a temperature where the thermoplastic may flow under moderate pressure, injecting the flowing thermoplastic under pressure into a mold corresponding to the desired  
10 shape of the final block and cooling the mold holding the thermoplastic to room temperature. The temperature where the thermoplastic material may flow under moderate pressure may be greater than 100°C.

According to an embodiment of the manufacturing  
15 method according to the invention, the single block preformed optical substrate block may be manufactured by sintering the thermoplastic material in a mold corresponding to the desired shape of the final preformed optical substrate block.

20 The inventors have noticed that after the cooling step, the ejection the sole thermoplastic block from the mold presents some difficulties. Indeed, the thermoplastic material may stick on the sides of the mold.

To overcome this difficulty the inventors have  
25 covered the internal sides of the mold with a silicon liner prior to introducing the thermoplastic material in the mold.

According to an embodiment of the manufacturing method according to the invention, the preformed optical  
30 substrate block may be obtained by providing the thermoplastic material into an open mold corresponding to the desired surface of the upper surface of the

thermoplastic block, heating the thermoplastic material in the mold to a temperature at least equal to the softening temperature of the thermoplastic material, applying on the free surface of the thermoplastic block a holding unit,  
5 cooling to room temperature the mold holding the preformed optical substrate block.

The upper surface of the holding unit may be provided with an adhesive tape layer as explained in detailed here above.

10 Furthermore, the inventors have noticed that separating the optical substrate from the thermoplastic blocking material is an issue. The deblocking step comprises ordinarily a hammering step. During the hammering step the optical substrate is struck with a mallet so as to  
15 generate a crack at the interface between the thermoplastic blocking composition and the lens blank.

The inventors have noticed that it is very difficult to deblock an optical substrate using a hammering step when the optical substrate is blocked with a  
20 thermoplastic material as disclosed in US 6,036,313.

The inventors have observed that when the thermoplastic material has a Shore D hardness at room temperature greater or equal to 40, the hammering step is more successful.

25 Thus, according to an embodiment of the invention, the thermoplastic material may comprise shellac and/or plasticizer chosen so as to have the hardness of the thermoplastic material at room temperature greater or equal to 40, for example greater or equal to 50, for example  
30 greater or equal to 60.



The thermoplastic material according to the invention may be formulated from a composition comprising as a percentage by weight of the thermoplastic material, at least or equal to 60%, for example at least or equal to 65%  
5 and/or at most or equal to 80%, for example at least or equal to 75%, of shellac and/or at least or equal to 20%, for example at least or equal to 25% and/or at most or equal to 40%, for example most or equal to 35%, of plasticizer.

10 Surprisingly, the inventors have observed that when the shellac and the plasticizer are mixed in such proportions the thermoplastic material has physical properties, for example a softening point and hardness, appropriate to be used as a blocking material for optical  
15 substrates and offering a suitable temperature range for blocking.

The thermoplastic material according to the invention may be formulated from a composition comprising a wide variety of additives depending upon the desired end  
20 use. Suitable additives include solvents, diluents, plasticizers, pigments, dyes, inorganic and organic fibrous or particulate reinforcing or extending fillers, nucleating agents, thixotropic agents, indicators, inhibitors, stabilizers, UV or IR absorbers, and the like.

25 According to an embodiment of the invention, the thermoplastic material composition may comprise, as a percentage by weight of the thermoplastic material, at most or equal to 10%, for example at most or equal to 5%.

The shellac selected may comprise waxed shellac  
30 and/or dewaxed shellac and/or bleached shellac.

According to an embodiment of the invention the plasticizer may comprise at least 80%, for example at least

95%, of rosin or modified rosin. The modified rosin may be ester of rosin, for example triethylene glycol ester of stabilized gum rosin or Resiester T3 sold by Luresa.

5 According to another embodiment of the invention the plasticizer comprises at least 80%, for example 95% of hydrocarbon-based resin. The hydrocarbon-based resin may be C5 aliphatic hydrocarbon resin, for example the Wingtack 10 sold by Cray Valley.

10 The invention also relates to the use of a thermoplastic material of the invention for blocking in a machining position an optical substrate, for example to be manufactured and/or edged and/or grinded.

15 According to an embodiment of the present invention, and as illustrated on figure 2, an optical substrate, for example an optical lens 100 is provided using providing means 400.

A preformed substrate block 300 made of a thermoplastic material is also provided.

20 The optical lens 100 may be positioned in a machining position, for example a manufacturing position and/or edging position and/or grinding position.

Before docking the optical lens 100, the preformed substrate block 300 is locally heated.

25 According to an embodiment of the invention, the upper surface 312 of the preformed substrate block 300 is heated through heating means 500, so as to let a zone of the thermoplastic material soften. The heating means 500 may be any known heating means, for example using UV or preferably IR lamps.

30 The optical lens 100 is then placed on the partly soften thermoplastic material and moderate pressure is

applied onto the optical lens 100. For example, the moderate pressure may correspond to manual pressure. The optical lens 100 is securely blocked after the cooling of the thermoplastic material and the optical lens is machined using conventional tools. The lower surface 314 remains in a solid state.

The blocking material should keep its shape when heated at a given temperature, while being sufficiently softened at the given temperature to fit the shape of the optical substrate upon moderate pressure.

The blocking material may then be cooled, for example said material may be left at room temperature for 10 to 15 min.

After machining the optical lens, the machined optical lens is deblocked and detached from the holding unit 200.

Advantageously, the use of a thermoplastic material according to the invention allows the deblocking step to comprise a hammering step.

The following examples are offered to illustrate the advantageous of the thermoplastic material according to the invention and are not to be considered as limiting the scope thereof. Unless indicated otherwise, all parts and percentages are by weight.

The thermoplastic material composition used for the following examples have been obtained by using different types of shellac and the triethylene glycol ester of stabilized gum rosin or Resiester T3 sold by Luresa as plasticizer.

The thermoplastic material used for the following examples have been obtained by first introducing the

shellac in a kneader at a temperature of 130°C. The Resiester T3 has then been introduced in the kneader. The kneader is then turned on for 30 min at 130°C so as to obtain a homogenous mixture of the shellac and the Resiester T3.

Table 1 indicates the measured softening temperature of different thermoplastic material according to the invention. The softening point has been measured using the "ball-ring" method as described in standard NF EN 1238.

	Waxed shellac	Dewaxed shellac	Bleached shellac
% of Resiester T3	40.2	41.9	36.3
Softening point (°C)	78.5	79.4	80.8

Table 1

As illustrated in table 1, the thermoplastic materials according to the invention have a softening point and there softening point is greater or equal to 60°C and/or smaller or equal to 85°C.

Table 2 compares the measured hardness at room temperature of thermoplastic materials according to the invention with a polycaprolactone thermoplastic material as disclosed in US 6,036,313 and with a metal alloy.

The metal alloy comprises as a percentage by weight of the alloy: 44.7% of Bismuth (Bi), 22.6% of Lead (Pb), 8.3 % of Tin (Sn), 5.3 % of Cadmium (Cd) and 19.1 % of Indium (In).

reference	Shore D Hardness
Waxed shellac/Resiester T3 (70/30)	55
Waxed shellac/Resiester T3 (75/25)	60
Dewaxed shellac/Resiester T3 (70/30)	55
Dewaxed shellac/Resiester T3 (75/25)	68
Bleached shellac/Resiester T3 (70/30)	40
Bleached shellac/Resiester T3 (75/25)	60
polycaprolactone thermoplastic	35
Metal alloy 117	73

Table 2

As illustrated in table 2, the thermoplastic materials according to the invention have a Shore D hardness greater than the thermoplastic material disclosed in US 6,036,313.

Furthermore, as illustrated in table 2, the thermoplastic material according to the invention having a about 75 % of shellac have a shore D hardness close to the one of the metal alloy 117.

Advantageously, the optical substrate blocked using a thermoplastic material according to the invention may be deblocked using a hammering method.

The invention has been described above with the aid of embodiments without limitation of the general inventive concept. In particular the present invention provides a method for blocking and/or deblocking all kinds of optical lenses, particularly ophthalmic lenses, e.g. single vision

(spherical, torical), bi-focal, progressive, aspherical lenses (etc..), semi-finished optical lenses and/or blanks, blanks for manufacturing optical lenses.

**CLAIMS**

1. Use of a thermoplastic material for blocking an  
5 optical substrate (100) in a machining position, wherein  
the thermoplastic material is formulated from a composition  
comprising a shellac and a plasticizer where the shellac  
and the plasticizer are chosen so as to have the softening  
point of the thermoplastic material greater than or equal  
10 to 60°C and smaller than or equal to 85°C.

2. The use according to claim 1, wherein the  
shellac and plasticizer are chosen so as to have the  
hardness of the thermoplastic material at room temperature  
15 greater than or equal to 40 when measured using the Shore D  
method.

3. The use according to claims 1 or 2, characterized  
in that the composition comprises, as a percentage by  
20 weight of the thermoplastic material, at least or equal to  
60% and at most or equal to 80% of shellac.

4. The use according to any of the preceding claims  
characterized in that the composition comprises, as a  
25 percentage by weight of the thermoplastic material, at  
least or equal to 20% and at most or equal to 40% of  
plasticizer.

5. The use according to any of the preceding  
30 claims, wherein the shellac comprises waxed shellac and/or  
dewaxed shellac and/or bleached shellac.

6. The use according to any of the preceding claims wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of rosin or modified rosin.

5

7. The use according to the preceding claim, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of ester of rosin.

10

8. The use according to claims 1 to 5, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of hydrocarbon-based resin.

15

9. The use according to claims 1 to 5, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of C5 aliphatic hydrocarbon resin.

20

10. A preformed optical substrate block comprising a thermoplastic block used to allow a optical substrate to be blocked on the preformed optical substrate block wherein the thermoplastic block is formulated from a composition comprising a shellac and a plasticizer where the shellac and the plasticizer are chosen so as to have the softening point of the thermoplastic material greater than or equal to 60°C and smaller than or equal to 85°C.

30

11. The preformed optical substrate block according to claim 10, wherein the shellac and plasticizer are chosen so as to have the hardness of the thermoplastic material at



room temperature greater than or equal to 40 when measured using the Shore D method.

12. The preformed optical substrate block according to claims 10 or 11, characterized in that the composition comprises, as a percentage by weight of the thermoplastic material, at least or equal to 60% and at most or equal to 80% of shellac.

13. The preformed optical substrate block according to any of claims 10 to 12, characterized in that the composition comprises, as a percentage by weight of the thermoplastic material, at least or equal to 20% and at most or equal to 40% of plasticizer.

14. The preformed optical substrate block according to any of claims 10 to 13, wherein the shellac comprises waxed shellac and/or dewaxed shellac and/or bleached shellac.

15. The preformed optical substrate block according to any of claims 10 to 14, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of rosin or modified rosin.

16. The preformed optical substrate block according to the preceding claim, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of ester of rosin.

17. The preformed optical substrate block according to claims 10 to 14, wherein the plasticizer comprises, as a

percentage by weight of the plasticizer, at least or equal to 80% of hydrocarbon-based resin.

18. The preformed optical substrate block according to claims 10 to 14, wherein the plasticizer comprises, as a percentage by weight of the plasticizer, at least or equal to 80% of C5 aliphatic hydrocarbon resin.

19. Method of blocking an optical substrate to be machined comprising the steps of:

- an optical substrate providing step in which a optical substrate (100) is provided;
- an preformed optical substrate block providing step in which a preformed optical substrate block (300) is provided;
- a surface heating step in which a surface of the preformed substrate block (300) is heated at a docking temperature greater than or equal to 50°C and smaller than or equal to 60°C;
- a docking step in which the optical substrate is docked to the heated surface of the preformed substrate block (300) so as to be positioned in a machining position; wherein the preformed optical substrate block (300) is according to any of claims 10 to 18.

1/2

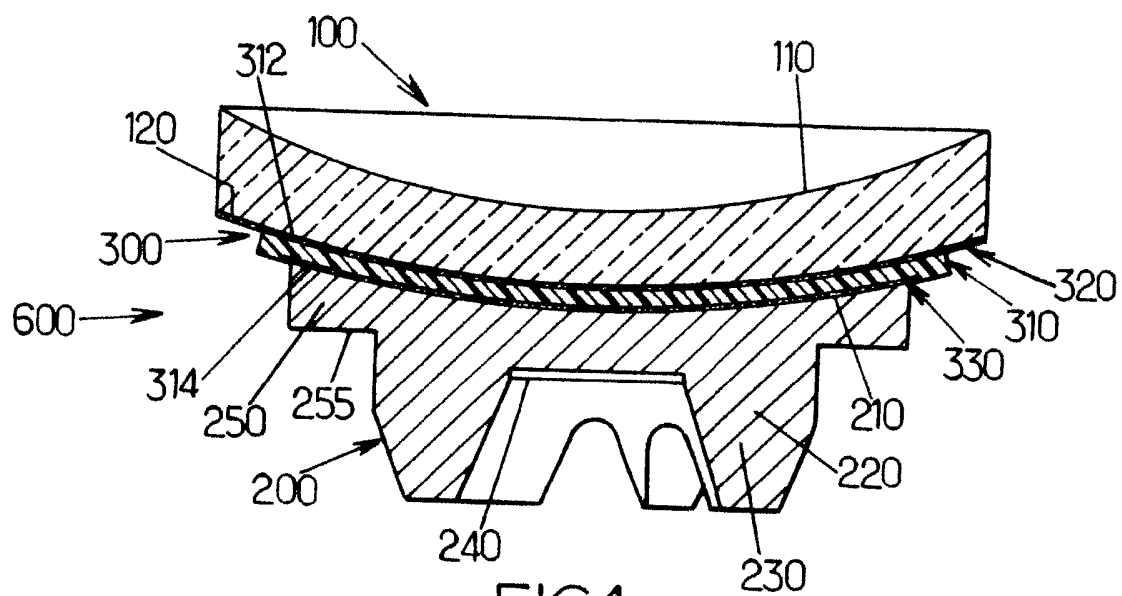


FIG.1.

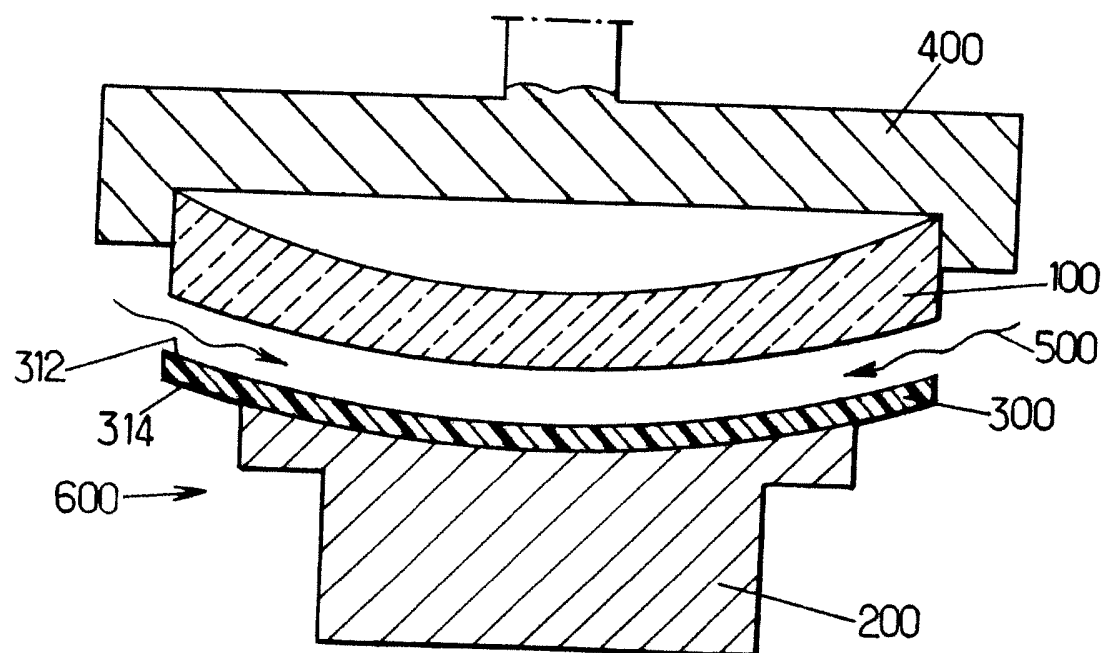


FIG.2.

2/2

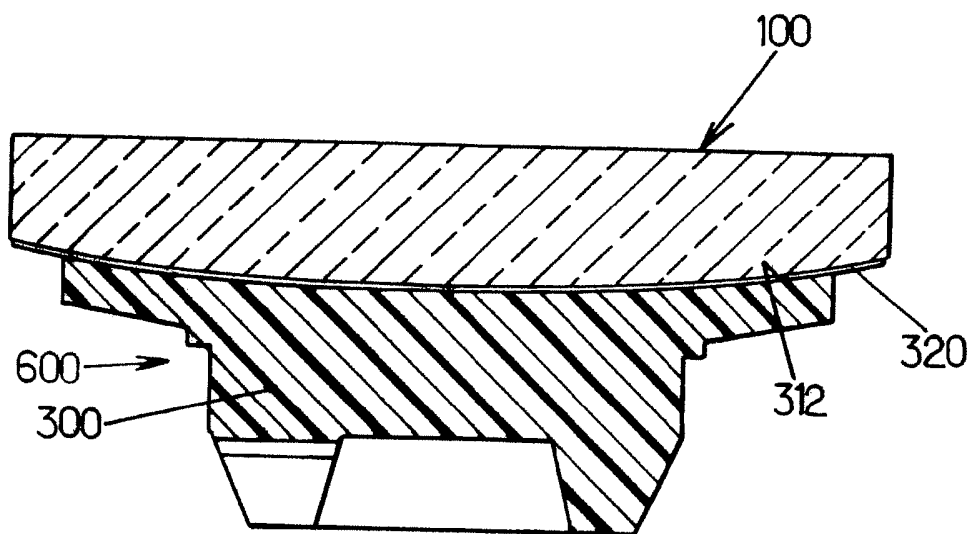


FIG.3.

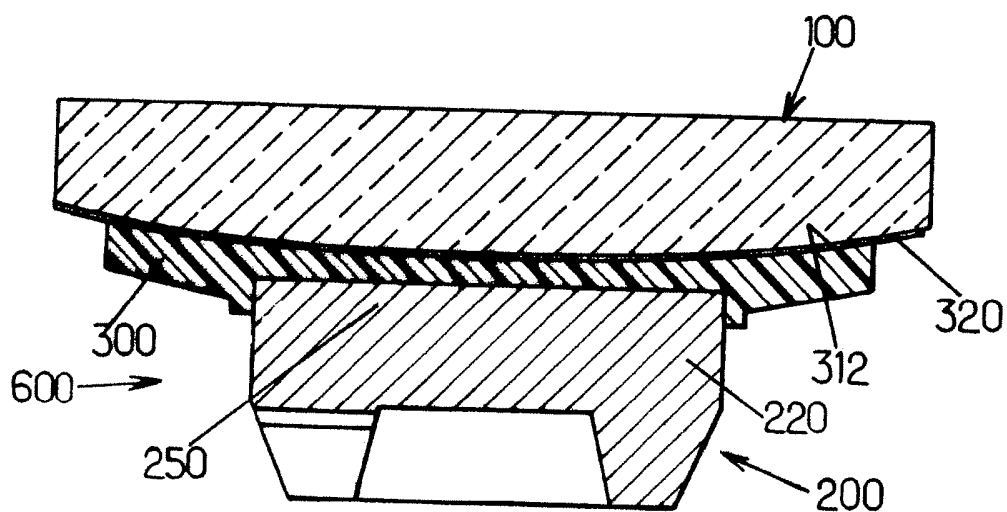


FIG.4.

# INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/064633

## A. CLASSIFICATION OF SUBJECT MATTER

INV. C08L93/02 B24B13/005

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08L B24B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP 2007 254571 A (INCTEC INC) 4 October 2007 (2007-10-04) abstract -----	1, 10, 19
A	US 3 297 535 A (ALLEN BUTLER JOHN ET AL) 10 January 1967 (1967-01-10) claim 1 -----	1, 10, 19
A	US 6 258 882 B1 (WACHOWIAK JR MELVIN JOSEPH [US]) 10 July 2001 (2001-07-10) claim 1 -----	1, 10, 19
A	US 5 754 269 A (BENJAMIN SHARON R [US] ET AL) 19 May 1998 (1998-05-19) claims 1, 6, 16 -----	1, 10, 19
	-/--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

25 November 2009

Date of mailing of the international search report

02/12/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Niaounakis, Michael

## INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2009/064633

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99/11430 A1 (MINNESOTA MINING & MFG [US]) 11 March 1999 (1999-03-11) claims 1,2 page 19, line 23 - line 26 -----	1,10,19
A	WO 97/10924 A1 (MINNESOTA MINING & MFG [US]) 27 March 1997 (1997-03-27) claims 1,6 -----	1,10,19
A	WO 98/41359 A1 (MINNESOTA MINING & MFG [US]) 24 September 1998 (1998-09-24) claims 1,5,7,9 -----	1,10,19
A	US 5 763 075 A (BENJAMIN SHARON R [US] ET AL) 9 June 1998 (1998-06-09) claims 1,3,12 -----	1,10,19
A	US 5 096 969 A (PAYNE JOHN W [US] ET AL) 17 March 1992 (1992-03-17) claim 1 -----	1,10,19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2009/064633

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2007254571	A	04-10-2007	NONE	
US 3297535	A	10-01-1967	BE 644336 A ES 296969 A1 NL 6401255 A	26-08-1964 16-07-1964 31-08-1964
US 6258882	B1	10-07-2001	NONE	
US 5754269	A	19-05-1998	US 6036313 A US 5885700 A	14-03-2000 23-03-1999
WO 9911430	A1	11-03-1999	AU 6026798 A EP 1009586 A1	22-03-1999 21-06-2000
WO 9710924	A1	27-03-1997	AU 7360696 A BR 9610536 A CA 2229801 A1 DE 69621625 D1 EP 0851800 A1 JP 11512480 T	09-04-1997 06-07-1999 27-03-1997 11-07-2002 08-07-1998 26-10-1999
WO 9841359	A1	24-09-1998	AU 6668298 A DE 69809721 D1 DE 69809721 T2 EP 0968074 A1	12-10-1998 09-01-2003 03-07-2003 05-01-2000
US 5763075	A	09-06-1998	NONE	
US 5096969	A	17-03-1992	AU 9142391 A WO 9209655 A1	25-06-1992 11-06-1992